

INSTALLATION INSTRUCTIONS

C-ACC-A-HKCRD-6FT Series

Document:	LPN00497X0001A0_A	Date:	03-22-2017
Created By:	TMT		



CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS


- DANGER**- Risk of shock- Disconnect power before installation.
DANGER – *Risque de choc – Couper l'alimentation avant l'installation.*
- This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.
- Use only Lamp specified for this fixture.
- Use of Safety Cable or Chain is recommended. In continuously operating Metal Halide systems (24 hours/day, 7 days/week), turn lamps off once per week for at least 15 minutes. Failure to comply increases the risk of violent lamp failure.
- Die-cast lock nuts should not be used to support fixture from conduit.
- Properly attach reflector to ballast housing module before applying voltage.
- Proper grounding is required to ensure personal safety.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

HOOK, CORD AND PLUG MOUNTING OPTION

- Thread the hook into the threaded opening on the driver compartment cover and tighten the hook.
- Remove the driver compartment cover by removing (3) Phillips head screws. See **Figure 1**.
- Insert cord through the hole in the center of the hook on top of the cover. Pull approximately 12" (305 mm) of cord through the hole and tie a single knot in the cord to act as a strain relief. The knot should be approximately 2" (51 mm) from the end of the cord insulation (not the individual wire insulation).
- Make wiring connections per Electrical Connections section.
- Replace driver compartment cover that was removed in Step 2 by tightening (3) Phillips head screws. Ensure that the gasket is properly positioned before tightening screws.

FIGURE 1

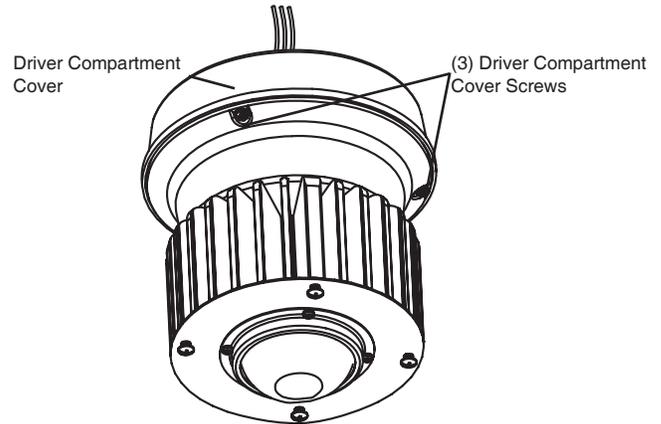

ELECTRICAL CONNECTIONS

Fixture is equipped with universal volt driver 120-277V (ie. 120V, 208V, 240V or 277V).

PHASE TO NEUTRAL WIRING 120/277V

- Connect cord ground to fixture ground (green) lead.
- Connect cord common to fixture neutral (white) lead.
- Connect cord Hot (black) to fixture hot (black) lead.

Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.

PHASE TO PHASE WIRING 208/240V

- Connect cord ground (green) to fixture ground (green) lead.
- Connect cord L1 (Hot) to fixture neutral (white) lead.
- Connect cord L2 (Hot) to fixture hot (black) lead.

Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.