

LED Programmable Multi-Level Options

For use with Cree Edge™ Series, 304 Series™, 228 Series™, CPY Series, OSQ™ Series, VG Series, IG Series, OSQ-HO Series, and XSPW™ Series Luminaires

Performance Summary

Adjustable High and Low Modes – High: 0 to 10V; Low: off to 9.8V

Adjustable Time Delay – 30 seconds, 1 to 30 minutes

Adjustable Cut Off Delay – none, 1 to 59 minutes, 1 to 5 hours

Adjustable Sensitivity – low, med, max, on-fix, off-fix

Adjustable Setpoint – 1 to 250 fc (11 to 2691 lux), disabled, auto

Adjustable Ramp Up and Fade Down Time – 1 to 60 seconds

Photocell – none, 1 to 250 fc (11 to 2691 lux)

Limited Warranty*: 5 years on sensor

* See <http://lighting.cree.com/warranty> for warranty terms

Accessories
Hand-Held Remote XA-SENSREM - For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

Product Description

The Cree® programmable multi-level (PML/PML2) option allows for the programming of multiple operating drive currents/input powers for high and low modes remotely through the use of a programmable handheld remote (XA-SENSREM). The drive currents/input powers are conveniently selected to balance LED life, lumen output and energy savings. Multi-level function is designed with all LEDs operating at the same current for maximum and uniform LED life.

The occupancy sensor used in the Cree programmable multi-level option uses passive infrared technology that reacts to changes in infrared energy (moving heat) within the coverage area. During operation if motion is detected within the sensor's coverage area, the relay in the sensor closes and the lighting load is automatically turned on to the selected High Mode setting. When motion is no longer detected for the duration of the Time Delay setting, the relay opens and the lighting load automatically reverts to the selected Low Mode setting and will eventually turn off if programmed to do so. The occupancy sensor includes field-adjustable settings for ambient light (Setpoint and Photocell), motion detection (Time Delay and Cut Off Delay), Sensitivity, Ramp Up Time, Fade Down Time, High and Low Mode – all of which can be changed in the field with the programmable handheld remote.

The **High Mode** feature is fully adjustable from 0 to 10V and is **factory set at 10V**, the maximum drive current for the selected luminaire.

The **Low Mode** feature can be adjusted from an off position to 9.8V. This feature is **factory set at 1V**.

The **Time Delay** feature can be adjusted from 30 seconds, or 1 to 30 minutes and is **factory set at 5 minutes**. The luminaire will switch to the Low Mode setting if no motion is detected by the sensor for the specified time interval.

The **Cut Off Delay** feature can be set to disabled [fixture never turns off, unless Low Mode is set to off] or set to a period from 1 minute up to 5 hours. The **factory setting is 1 hour**. This feature allows the luminaire to switch from Low Mode to off after no motion is detected by the sensor for the specified duration of time.

The **Sensitivity** feature can be set to low, medium or maximum and is **factory set for maximum sensitivity** to motion within the coverage area of the sensor. In addition, there are the "on-fix" and "off-fix" modes, which will force the luminaire to stay on at the High Mode setting or off, respectively. When in either of these modes, motion detection and ambient light sensing functionality are disabled. These two modes are typically only used for troubleshooting.

The **Setpoint** feature is **factory set at disabled**. The Setpoint feature can be adjusted from 1 to 250 fc (11 to 2691 lux). When a numerical value is entered, the sensor will not transition to High Mode from motion if the light level is greater than the Set Point. Otherwise, if the light level is less than the Setpoint, motion will switch the luminaire to High Mode. If Low Mode is set to off or if the Cut Off Delay feature is enabled, then the luminaire will turn off and stay off until the light level falls below the Setpoint. There is also an auto option which is designed to automatically calibrate an appropriate Setpoint value based on the contribution of the luminaire's own light by a process in which the controlled load is turned on for two minutes to warm up the lamp and is then switched off and on eight times. Settings will vary based on application.

The **Ramp Up and Fade Down Time** features are **factory set at none** which means that the lights will switch from Low Mode to High Mode or from High Mode to Low Mode instantly. This feature may be adjusted from 1 to 60 seconds.

The **Photocell** (Off with Occupancy) feature is **factory set at disabled**. This feature may be adjusted from 1 to 250 fc (11 to 2691 lux). When this feature is enabled, if the light level is greater than the programmed value, the luminaire will remain off regardless of motion. When this setting is used in combination with the Setpoint feature, there must be at least 10fc (108 lux) of dead band between the two settings to help avoid load cycling. If the luminaire is off, it will turn on in High Mode when the light level decreases below the Setpoint value. If the luminaire is on and the light level is lower than the Photocell value but higher than the Setpoint value, then the luminaire will switch to Low Mode and the sensor will not transition to High Mode from motion.

Rev. Date: V7 10/10/2018



Figure 1 – Cree Edge™ Area/Flood, OSQ™ Series Area/Flood, and OSQ-HO Area/Flood Luminaires

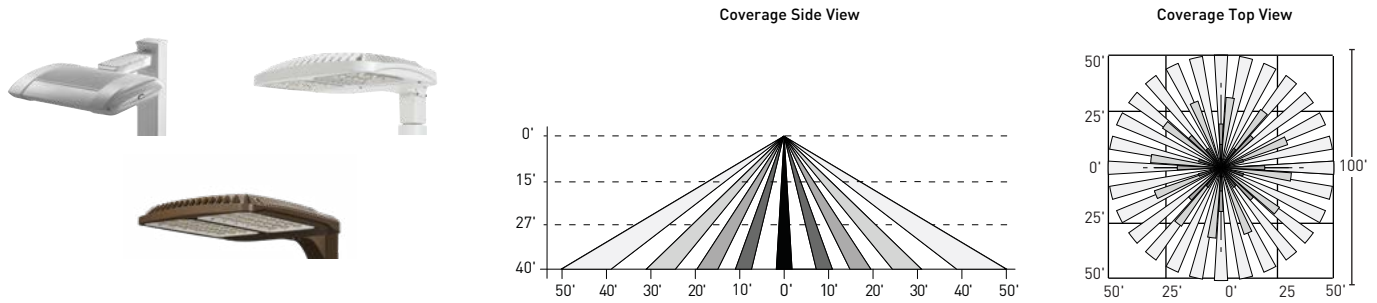


Figure 2 – Cree Edge™ Area/Flood and OSQ™ Area/Flood Luminaires, and Cree Edge™ Canopy, 304 Series™ Canopy, 228 Series™ Canopy, CPY250® Canopy/Soffit, and XSPW™ Version B Wall Mount Luminaires


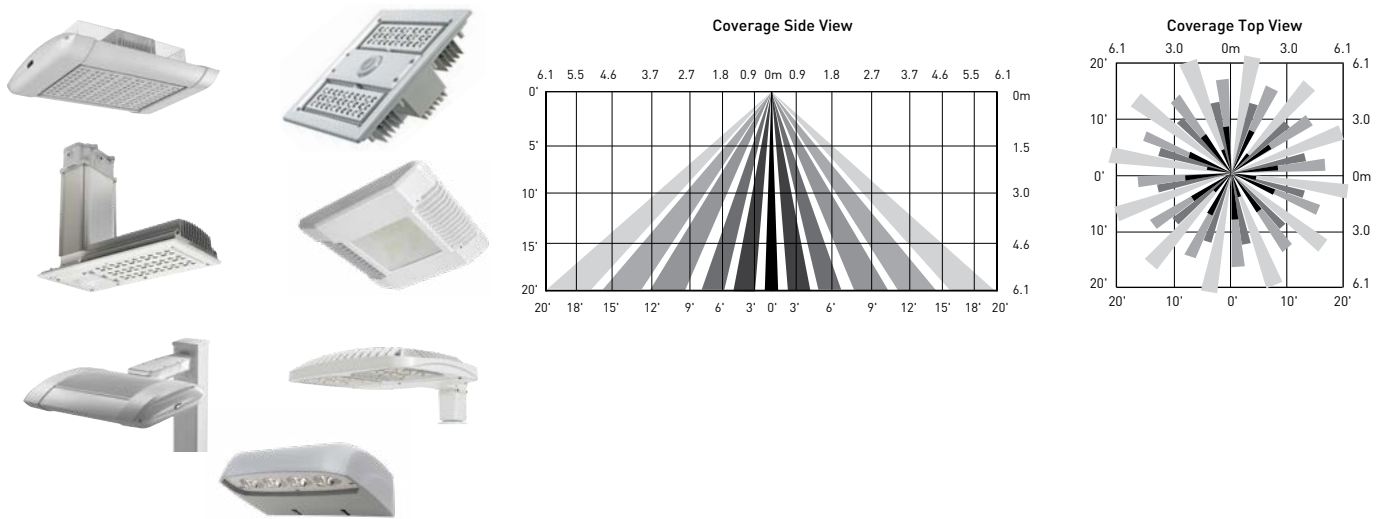


Figure 3 – Cree Edge™ Parking Structure, 304 Series™ Parking Structure, VG Series Vehicle Garage, and IG Series Parking Structure Luminaires

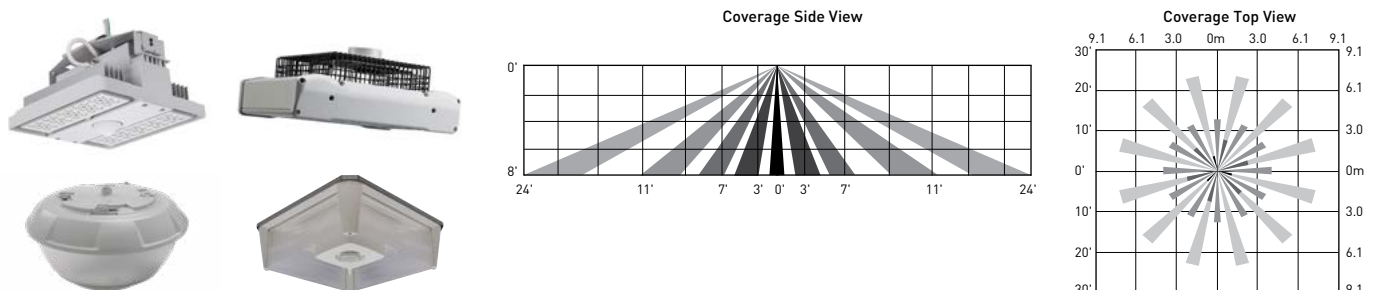

LED Programmable Multi-Level Options

Sensor Details			
Figure	Luminaire	PML Option	Coverage Area
1	Cree Edge Area/Flood, OSQ Series Area/Flood, OSQ-HO Area/Flood Luminaires	PML	Lens coverage: 40' (12.2m) optimal mounting height and 100' (30.5m) diameter coverage with a 360° circular pattern. The maximum mounting height is 40' (12.2m). Lens mounting height to coverage radius is 1:0.80. Note: When mounting height are above 30' (9.1m), the sensor only detects large objects such as fork lift trucks or cars.
2	Cree Edge Canopy, 304 Series Recessed Canopy, 228 Series Recessed Canopy, CPY250 Canopy/Soffit, XSPW™ Version B Wall Mount Luminaires	PML	Lens coverage: 20' (6.1m) optimal mounting height and 40' (12.2m) diameter coverage area with a 360° circular pattern. The minimum and maximum mounting heights are 10' (3.0m) and 30' (9.1m) respectively. Lens mounting height to coverage radius ratio is 1:1.
	Cree Edge Area/Flood, OSQ Series Area/Flood Luminaires	PML2	
3	Cree Edge Parking Structure, Cree Edge Security, 304 Series Parking Structure, VG Series Vehicle Garage, IG Series Parking Structure Luminaires	PML	Lens coverage: 10' (3.0m) optimal mounting height and 50' (15.2m) diameter coverage area with a 360° circular pattern. The maximum mounting height is 15' (4.6m). Lens mounting height to coverage radius is 1:2.5.

Product Availability												
Drive Current	Voltage	Cree Edge™ Series Luminaires			304 Series™						228 Series™	
		Area	Canopy	Security	Parking Structure	Recessed Canopy	Upgrade Kits	Flood	Soffit (Non-IC only)	Interior (Non-IC only)	Recessed Canopy	
350mA	120-277V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	347-480V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
525mA	120-277V	80-160 LED ^{F,P,R}	80-160 LED ^{F,P,R}	80 LED ^F	N/A	N/A	40-60 LED	N/A	60 LED ^F	60 LED ^F	N/A	N/A
	347-480V	80-120 LED	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
700mA	120-277V	20-60 LED ^{F,P,R}	40-60 LED ^{F,P,R}	20-60 LED ^F	40-60 LED ^F	40-60 LED ^F	N/A	40-60 LED ^F	40 LED ^F	40 LED ^F	90 LED	N/A
	347-480V	20-60 LED	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1000mA	120-277V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	347-480V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

F - PML option available with Fusing option
P - PML option available with Photocell option
R - PML option available with NEMA® Photocell Receptacle option

Product Availability						
Voltage	CPY Series	VG Series	OSQ Series	IG Series	OSQ-HO Series	XSPW-B Series
	Canopy/Soffit	Vehicle Garage	Area/Flood	Parking Structure	Area/Flood	Wall Mount
UL	Version B - A, B, C, E & F Input Power Designators	Version A and Version B	A, B, J, K, S, T & U Input Power Designators ^{F,R}	A & J Input Power Designators	40L & 50L Lumen Packages	All Lumen Packages ³
UH, 34, 48	N/A	Version A ¹ and Version B ²	B, K, T & U Input Power Designators ^F	A & J Input Power Designators ²	40L & 50L Lumen Packages	N/A

F - PML option available with Fusing option
R - PML option available with NEMA® Photocell Receptacle option
1 - Must specify 34 (347V) or 48 (480V)
2 - Available with 34 (347V) only
3 - May not be used with other options

PML High & Low Mode Multipliers – 525mA Drive Current

For use with Cree Edge Canopy Luminaires and 304 Series Parking Structure and Canopy Luminaires

0-10V	Drive Current (mA)	System Watts Multiplier	Lumen Multiplier
<= 1.3	75	0.15	0.15
2.1	125	0.26	0.27
2.5	150	0.31	0.31
2.8	175	0.36	0.37
3.6	225	0.45	0.45
4.4	275	0.55	0.53
5.1	325	0.64	0.62
5.5	350	0.67	0.70
6.7	425	0.83	0.80
7.5	475	0.92	0.89
≥ 8.7	525	1.00	1.00

PML High & Low Mode Multipliers – 700mA Drive Current

For use with Cree Edge Canopy Luminaires, 304 Series Parking Structure and Recessed Canopy Luminaires and 228 Series Recessed Canopy Luminaires

0-10V	Drive Current (mA)	System Watts Multiplier	Lumen Multiplier
<= 1.2	75	0.11	0.12
1.7	125	0.19	0.21
2.0	150	0.23	0.25
2.3	175	0.26	0.29
2.8	225	0.32	0.35
3.4	275	0.40	0.42
4.0	325	0.47	0.49
4.2	350	0.50	0.56
5.1	425	0.62	0.63
5.6	475	0.68	0.70
6.2	525	0.76	0.79
6.5	550	0.80	0.80
6.8	575	0.83	0.84
7.3	625	0.90	0.91
≥ 8.4	700	1.00	1.00



LED Programmable Multi-Level Options

PML High & Low Mode Multipliers – CPY Series

For use with Version B CPY250® Canopy/Soffit Luminaires with A, B, C, E & F Input Power Designators and UL voltage

CPY Series Version B – Input Power Designator A		
0-10V	120-277V	
	System Watts Multiplier	Lumen Multiplier
<= 1.0	0.10	0.09
1.6	0.17	0.17
1.9	0.22	0.21
2.2	0.25	0.25
2.8	0.32	0.32
3.4	0.40	0.39
3.9	0.47	0.44
4.2	0.50	0.48
5.1	0.62	0.59
5.7	0.70	0.67
6.3	0.78	0.75
6.6	0.82	0.79
6.9	0.87	0.83
7.5	0.95	0.93
10.0	1.00	1.00

CPY Series Version B – Input Power Designator B		
0-10V	120-277V	
	System Watts Multiplier	Lumen Multiplier
<= 1.1	0.13	0.14
1.6	0.19	0.20
2.0	0.24	0.26
2.3	0.29	0.31
2.9	0.38	0.40
3.0	0.40	0.42
3.4	0.46	0.49
3.8	0.50	0.53
4.2	0.58	0.61
5.2	0.74	0.77
5.8	0.83	0.85
6.4	0.93	0.93
>= 6.9	1.00	1.00

CPY Series Version B – Input Power Designator C		
0-10V	120-277V	
	System Watts Multiplier	Lumen Multiplier
<= 1.0	0.19	0.17
1.3	0.26	0.21
1.8	0.32	0.29
2.1	0.35	0.34
2.5	0.42	0.40
2.6	0.45	0.42
3.0	0.52	0.48
3.3	0.55	0.53
3.7	0.61	0.59
4.2	0.68	0.67
5.2	0.84	0.82
5.3	0.87	0.84
5.8	0.94	0.91
>= 6.5	1.00	1.00

PML High & Low Mode Multipliers – CPY Series

For use with Version B CPY250® Canopy/Soffit Luminaires with A, B, C, E & F Input Power Designators and UL voltage

CPY Series Version B – Input Power Designator E		
0-10V	120-277V	
	System Watts Multiplier	Lumen Multiplier
<= 1.0	0.10	0.11
1.6	0.16	0.17
1.9	0.20	0.21
2.2	0.23	0.24
2.8	0.32	0.33
3.4	0.40	0.42
3.9	0.46	0.48
4.2	0.50	0.52
5.1	0.62	0.65
5.7	0.69	0.72
6.3	0.79	0.80
6.6	0.82	0.84
6.9	0.85	0.85
7.5	0.94	0.95
>= 8.0	1.00	1.00

CPY Series Version B – Input Power Designator F		
0-10V	120-277V	
	System Watts Multiplier	Lumen Multiplier
<= 1.0	0.14	0.14
1.3	0.16	0.17
1.6	0.21	0.22
1.8	0.25	0.25
2.1	0.29	0.30
2.6	0.36	0.38
3.0	0.44	0.44
3.3	0.47	0.48
3.7	0.56	0.58
4.2	0.64	0.64
5.2	0.80	0.80
5.3	0.84	0.84
5.8	0.91	0.90
>= 6.5	1.00	1.00



LED Programmable Multi-Level Options

PML/PML2 High & Low Mode Multipliers – OSQ Series

For use with OSQ™ Luminaires with A, J & S Input Power Designators and UL voltage

OSQ Series – A, J & S Input Power Designators		
0-10V	120-277V	
	System Watts Multiplier	Lumen Multiplier
<= 1.1	0.12	0.15
1.6	0.18	0.24
2.0	0.22	0.30
2.2	0.27	0.35
2.9	0.34	0.43
3.5	0.41	0.51
4.0	0.48	0.59
4.2	0.50	0.61
4.7	0.57	0.68
5.4	0.64	0.73
5.8	0.71	0.80
6.3	0.78	0.85
7.2	0.85	0.91
7.4	0.90	0.94
7.7	0.95	0.98
10.0	1.00	1.00

PML/PML2 High & Low Mode Multipliers – OSQ Series

For use with OSQ™ Luminaires with B, K & T Input Power Designators with UL and UH voltages

OSQ Series – B, K & T Input Power Designators		
0-10V	120-480V	
	System Watts Multiplier	Lumen Multiplier
<= 0.7	0.15	0.13
1.3	0.17	0.19
1.6	0.22	0.24
1.8	0.25	0.28
2.1	0.31	0.33
2.5	0.38	0.40
2.6	0.40	0.42
3.0	0.46	0.48
3.3	0.50	0.53
3.7	0.58	0.59
3.9	0.61	0.63
4.2	0.68	0.67
4.6	0.71	0.74
5.3	0.84	0.84
5.5	0.90	0.87
5.9	0.91	0.91
6.4	0.99	0.98
>= 6.5	1.00	1.00

PML/PML2 High & Low Mode Multipliers – OSQ Series

For use with OSQ™ Luminaires with U Input Power Designator with UL and UH voltages

OSQ Series – U Input Power Designator		
0-10V	120-480V	
	System Watts Multiplier	Lumen Multiplier
<= 1.0	0.09	0.12
1.3	0.10	0.14
1.8	0.16	0.21
2.1	0.20	0.26
2.4	0.25	0.30
2.6	0.27	0.33
3.0	0.32	0.39
3.3	0.36	0.44
3.5	0.39	0.46
3.9	0.44	0.52
4.0	0.45	0.53
4.2	0.48	0.56
4.6	0.53	0.61
5.1	0.60	0.68
5.3	0.62	0.70
5.8	0.69	0.76
5.9	0.71	0.77
6.3	0.75	0.82
6.5	0.80	0.84
6.9	0.83	0.88
7.2	0.89	0.92
7.7	0.96	0.96
10.0	1.00	1.00

PML High & Low Mode Multipliers – VG-A Series

For use with VG Series Luminaires with A Input Power Designator and UL, 34 or 48 voltages

VG-A Series Luminaires		
0-10V	120-277V, 347V, 480V	
	System Watts Multiplier	Lumen Multiplier
<= 0.8	0.15	0.12
1.3	0.19	0.17
1.7	0.23	0.23
2.0	0.27	0.27
2.4	0.31	0.33
2.7	0.35	0.39
3.2	0.41	0.45
3.7	0.46	0.52
4.4	0.55	0.60
5.1	0.64	0.68
5.7	0.72	0.76
6.5	0.82	0.86
7.1	0.90	0.91
10.0	1.00	1.00

PML High & Low Mode Multipliers – VG-B Series

For use with VG Series Luminaires with all lumen packages and UL or 34 voltages

VG-B Series Luminaires		
0-10V	120-277V, 347V	
	System Watts Multiplier	Lumen Multiplier
1.0	0.09	0.11
2.0	0.21	0.25
3.0	0.33	0.39
4.0	0.47	0.51
5.0	0.60	0.63
6.0	0.72	0.75
7.0	0.85	0.87
10.0	1.00	1.00



LED Programmable Multi-Level Options

PML High & Low Mode Multipliers – IG Series

For use with IG Series Luminaires with A & J Input Power Designators and UL or 34 voltages

IG Series Luminaires		
0-10V	120-347V	
	System Watts Multiplier	Lumen Multiplier
</= 0.8	0.17	0.14
1.3	0.19	0.17
1.7	0.24	0.22
2.0	0.27	0.26
2.4	0.32	0.35
2.7	0.36	0.44
3.2	0.42	0.51
3.7	0.47	0.55
4.4	0.56	0.67
5.1	0.65	0.75
5.7	0.73	0.83
6.5	0.83	0.86
7.1	0.90	0.90
10.0	1.00	1.00

PML High & Low Mode Multipliers – OSQ-HO Series

For use with OSQ-HO Luminaires with 40L & 50L Lumen Packages and UL & UH voltages


OSQ-HO Area Luminaires – 40L/50L		
0-10V	120-480V	
	System Watts Multiplier	Lumen Multiplier
</= 1.0	0.11	0.13
1.7	0.17	0.20
2.1	0.21	0.25
2.4	0.25	0.30
3.0	0.32	0.39
3.5	0.39	0.46
3.9	0.44	0.51
4.2	0.49	0.56
4.8	0.55	0.63
5.3	0.62	0.70
5.8	0.70	0.76
6.3	0.77	0.82
6.9	0.85	0.89
7.2	0.90	0.92
7.6	0.95	0.96
>/= 8.0	1.00	1.00

LED Programmable Multi-Level Options

PML High & Low Mode Multipliers – XSPW-B Series

For use with XSPW-B Series Luminaires with all lumen packages and UL voltage

XSPW-B Series Luminaires									
Lumen Package	0-10V Dim Setting	3000K/70 CRI		4000K/70 CRI		5000K/90 CRI		5700K/70 CRI	
		Lumen Multiplier	Power Multiplier	Lumen Multiplier	Power Multiplier	Lumen Multiplier	Power Multiplier	Lumen Multiplier	Power Multiplier
2L	10.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	9.0	0.91	0.90	0.86	0.89	0.92	0.88	0.86	0.89
	7.6	0.77	0.80	0.74	0.79	0.78	0.79	0.73	0.79
	6.3	0.65	0.65	0.61	0.68	0.64	0.67	0.61	0.63
	5.0	0.51	0.55	0.49	0.53	0.50	0.54	0.49	0.53
	3.7	0.38	0.40	0.36	0.42	0.35	0.42	0.36	0.42
	2.3	0.24	0.30	0.22	0.32	0.18	0.29	0.22	0.26
	1.0	0.20	0.30	0.20	0.32	0.10	0.25	0.20	0.32
4L	10.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	9.0	0.91	0.91	0.89	0.94	0.91	0.90	0.89	0.90
	7.6	0.78	0.79	0.77	0.81	0.78	0.78	0.76	0.77
	6.3	0.66	0.67	0.65	0.68	0.64	0.68	0.63	0.65
	5.0	0.53	0.55	0.52	0.55	0.50	0.55	0.65	0.55
	3.7	0.40	0.42	0.39	0.42	0.34	0.43	0.38	0.42
	2.3	0.25	0.27	0.24	0.29	0.16	0.28	0.24	0.29
	1.0	0.12	0.18	0.12	0.19	0.08	0.15	0.12	0.19
6L	10.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	9.0	0.92	0.88	0.85	0.91	0.94	0.92	0.86	0.89
	7.6	0.80	0.75	0.74	0.79	0.84	0.78	0.74	0.77
	6.3	0.68	0.65	0.63	0.68	0.73	0.68	0.63	0.66
	5.0	0.55	0.53	0.51	0.55	0.61	0.55	0.51	0.55
	3.7	0.42	0.41	0.39	0.43	0.46	0.43	0.39	0.43
	2.3	0.26	0.27	0.25	0.30	0.29	0.28	0.24	0.28
	1.0	0.12	0.16	0.11	0.15	0.10	0.15	0.11	0.15
8L	10.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	9.0	0.91	0.90	0.87	0.92	0.97	0.90	0.86	0.90
	7.6	0.79	0.77	0.76	0.78	0.89	0.77	0.75	0.77
	6.3	0.68	0.64	0.65	0.65	0.79	0.64	0.64	0.65
	5.0	0.56	0.52	0.54	0.53	0.67	0.53	0.53	0.52
	3.7	0.43	0.40	0.41	0.40	0.52	0.40	0.41	0.41
	2.3	0.28	0.26	0.27	0.26	0.33	0.27	0.26	0.27
	1.0	0.12	0.13	0.12	0.14	0.13	0.13	0.12	0.14

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. Cree®, the Cree logo, and CPY® are registered trademarks, and Cree Edge™, 304 Series™, 228 Series™, OSQ™, and XSPW™ are trademarks of Cree, Inc. NEMA® is a registered trademark of the National Electrical Manufacturers Association.

