


CREE LIGHTING

RR6

INCLUDING RR6-GU24, RR6-277V,
RR6-UNI

INSTALLATION INSTRUCTIONS & 6 1/4" TEMPLATE FOR REMODELING

The RR6 family is for use with LR6™, LE6™, LR6X
CR6T and CR6™ families.

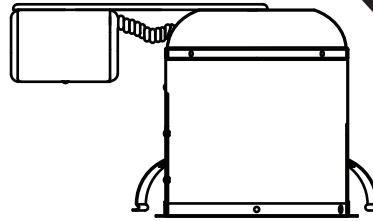

STEP 1

Use this template to draw a circle in the desired location.

STEP 2

Accurately cut the hole out of the ceiling.

STEP 3

Using flexible metal conduit, supply AC input wires through opening.

STEP 4

Open RR6 junction box door and pry off a conduit knockout opening in the side of the junction box. Attach conduit to the junction box securely and route wires inside the box for connection. See wiring diagram on reverse for proper connections.



STEP 5

After wires are connected as shown, close the cover on the junction box.

STEP 6



With clips rotated inside the can (**Fig. 1**) insert remodeled can into the ceiling starting with the junction box first.

STEP 7

Hold the can up flush to the ceiling surface and push the clips through the slots on the housing.

STEP 8


To lock the clips in place, push the flat portion against the side of the can and push up until clip locks into place. (**Fig. 2**) **CONTINUE TO BACK**




Front Side

Notes:

1. Material: White 90lb card stock paper.
2. Black ink on white bond paper
3. Card cut into 4.25" diameter circles

			TOLERANCES:		<h1>CREE  LIGHTING</h1>
			DRAWN: TMT		<h2>RR6 Instruction</h2> <p>Sheet pg 1 of 2</p>
			DATE: 12/16/19		
			APPR: SCALE: FULL		
A	Initial Release	12/16/19			DWG. NO. LPN00215X0003A
REV.	DESCRIPTION	DATE:	SHEET: 1 of 1		

RR6 WIRING DIAGRAM

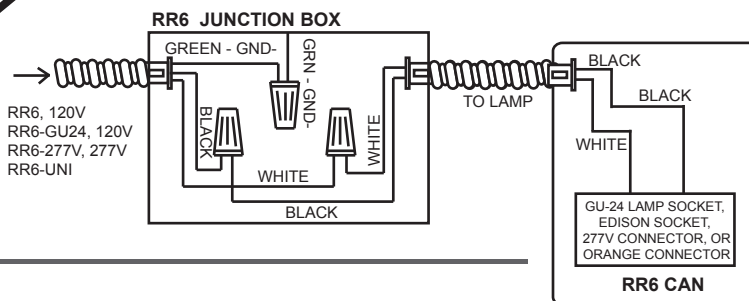


STEP 9

To release the clips, pull down clip. (Fig. 3)

STEP 10

Now the RR6 is ready to install the LR6X, LR™, CR6T, or CR6™.

NOTE: In areas where excessive ceiling vibration can occur, we suggest using a 1/4 x 14 x .5" sheet metal screw to further lock the clips against the housing. Drive the screws through the slots in the clips and into the can.



© 2019 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. See www.creelighting.com/warranty for warranty and specifications. Cree® and the Cree logo are registered trademarks of Cree, Inc. LR6™ and CR6™ is a trademark of Cree Lighting, A company of IDEAL INDUSTRIES.

LPN00215X0003A0_A

Notes:

1. Material: White 90lb card stock paper.
2. Black ink on white bond paper
3. Card cut into 4.25" diameter circles

		TOLERANCES:		
		DRAWN: TMT		RR6 Instruction Sheet pg 1 of 2
		DATE: 12/16/19		
		APPR:		
		SCALE: FULL		
A	Initial Release	12/16/19		
REV.	DESCRIPTION	DATE:	SHEET: 1 of 1	DWG. NO. LPN00215X0003A