

C-FL-A-RC-2L Series

Premium LED Compact Floodlight - Small

Replaces 70W MH



VERSATILE, COMPACT & BRIGHT!

Premium LED Compact Floodlights small enough to hide in landscaping and bright enough (up to 2100 lumens) to use for uplighting. These fixtures mirror the traditional form factor of HID Floods, while using up to 80% less energy.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 2,100
- CRI: ≥ 70
- CCT: Neutral White 4000K
- Input Power: 19 Watts
- Dimmable: No
- Distribution: 108° Flood (Wide)
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated >50,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5 Years*
- Replaces 70W MH

EFFICIENT	DURABLE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Replaces 70W MH while using 80% less energy 	<ul style="list-style-type: none"> • Sturdy, die-cast aluminum housing • Tempered glass lens with stands shock and impact 	<ul style="list-style-type: none"> • Building facades • Security • Architectural landscaping • Highlighting signs & displays 	<ul style="list-style-type: none"> • Universal (120V through 277V Operation)

ORDERING INFORMATION


Example: C-FL-A-RC-2L-40K-DB

C-FL-A	RC	2L	40K	
PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-FL-A	RC Compact Flood	2L 2,100 Lumens 19W	40K Neutral White (4000K)	DB Dark Bronze WH White

CERTIFICATIONS:



C-FL-A-RC-2L Series

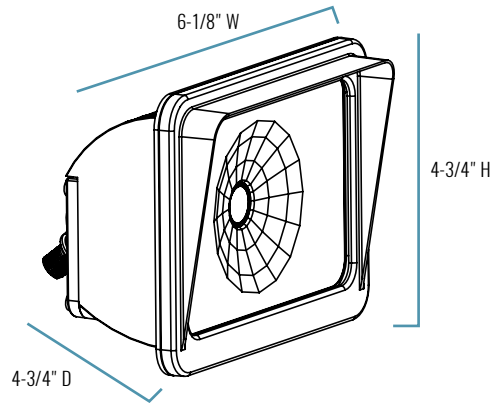

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
4-3/4" D x 6-1/8" W x 4-3/4" H	2.0 lbs.	8 to 15 feet	N/A

FIXTURE SPECIFICATIONS

HOUSING	Low-copper, die-cast aluminum housing Dark bronze or white polyester powder-coat finish
LENS ASSEMBLY	Tempered glass lens is thermal, shock and impact resistant
MOUNTING	1/2" NPS aluminum die-cast swivel fitter attaches to standard junction box

ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated >50,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.16A	0.09A	0.08A	0.07A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 11/03/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE