


INSTALLATION INSTRUCTIONS

C-FL-A-RDC Series

Document:	LPN00475X0001A0_A	Date:	03-22-2017
Created By:	TMT		

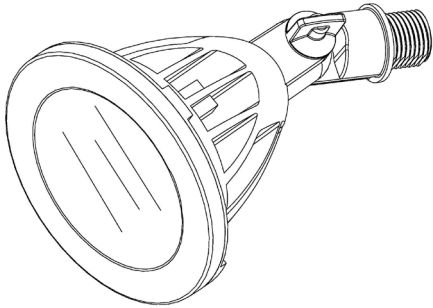

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- DANGER**- Risk of shock- Disconnect power before installation.
DANGER – Risque de choc – Couper l'alimentation avant l'installation.
- This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.
- For supply wire temperature rating, refer to fixture label.
- Only use in 120 – 270 Volt applications.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

INSTALLATION

- Thread the floodlight mounting arm into the 1/2" opening of the cover and secure it with 1/2" locknut.

FIXTURE WIRING

- Connect the black fixture lead to the voltage supply lead with customer supplied wire connector.
- Connect the white fixture lead to the neutral supply lead with the customer supplied wire connector.
- Connect the green or green/yellow or bare copper ground lead to the supply ground lead with the customer supplied wire connector.

TO AIM FIXTURE

- Loosen the side bolt connected to the arm knuckle to aim the fixture up or down. Re-tighten bolt to secure the fixture in the desired position.
- For a rain-tight seal, caulk the aiming arm joint, top and sides of the canopy with silicone caulking compound.