

C-HB-A-L4F-28L Series

LED Linear High Bay

Replaces 6-Lamp - T5HO 54W

C-LITE
LED LIGHTING BY CREE

DESIGNED WITH YOUR BUDGET IN MIND, THESE LED LINEAR HIGH BAYS OFFER:

- A simple, streamlined design that's cost effective
- The right amount of power for your application - up to 127 lumens per watt
- A footprint that is 60% smaller than comparable technology



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 28,500 (with no lens)
- CRI: 80
- CCT: Cool White (5000K)
- Input Power: 220 Watts
- Dimmable: N/A
- Mounting: Included v-hook, 36" chain and 6' cord with straight blade plug
- Operating Range: -18°C - 50°C (0°F - 122°F) No Lens, -18°C - 40°C (0°F - 104°F) with Clear or Frosted Lens
- Lifespan: Estimated >70,000 Hours
- Power Factor: > 0.99
- Total Harmonic Distortion: < 10%
- Limited Warranty: 5 Years*
- Replaces 6-Lamp - T5HO 54W

HIGH PERFORMANCE	VALUE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Up to 60% energy savings compared to linear fluorescent fixtures• High-powered, discrete LEDs are engineered for consistent coverage	<ul style="list-style-type: none">• Comes standard without lens for low cleaning maintenance• High-output frosted lens available for a soft glow and LED protection• 6' straight blade plug included	<ul style="list-style-type: none">• Warehouses• Industrial• Retail	<ul style="list-style-type: none">• Universal (120V through 277V Operation)

ORDERING INFORMATION

Example: C-HB-A-L4F-28L-50K-WH

C-HB-A	L4F	28L	50K	WH
PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-HB-A	L4F LED Linear High Bay	28L 28,500 Lumens, 220W (with no lens)	50K Cool White (5000K)	WH White

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-HB-A-L4F-28L Series

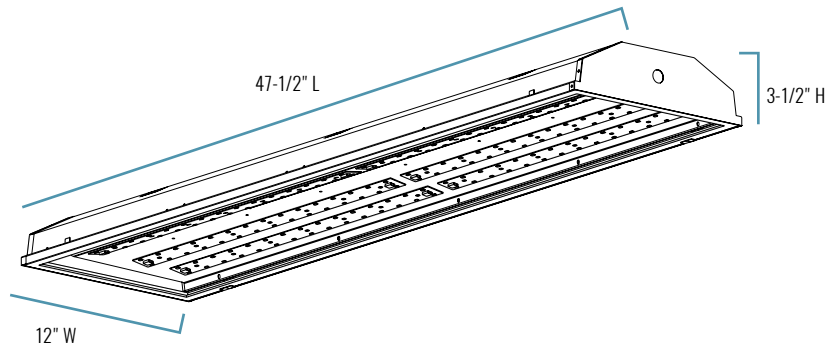

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
47-1/2" L x 12" W x 3-1/2" H	8.0 lbs.	25 to 40 feet	1 to 1-1/2 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	High-quality steel housing with UV-stabilized, powder-coat finish
LENS ASSEMBLY	Comes standard with no lens. Frosted and clear polycarbonate lenses (sold separately)
MOUNTING	Included v-hook, 36" chain and 6' cord with straight blade plug Fixture must be mounted a minimum of 7" below ceiling

ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-18°C - 50°C (0°F - 122°F) No Lens -18°C - 40°C (0°F - 104°F) with Clear or Frosted Lens	Estimated >70,000 Hours	> 0.99	< 10%	N/A
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	1.85A	1.06A	0.92A	0.82A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5 Year Limited*	Damp Locations	DLC Qualified

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507





Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE

C-HB-A-L4F-28L Series


ACCESSORIES (available with fixture purchase only)

	<p>6' HIGH-OUTPUT FROSTED LENS - MADE FROM POLYCARBONATE MATERIAL</p> <p>SKU: C-HB-A-LHBFL-12x48 USE: With C-HB-A-L4F-20L & C-HB-A-L4F-28L Series only</p>
	<p>6' CORD & HOOK WITH TWIST-LOCK PLUG</p> <p>SKU: C-ACC-A-HKCRD-6FT-LV-TL (120V) C-ACC-A-HKCRD-6FT-HV-TL (277V) C-ACC-A-HKCRD-6FT-MV-TL (208V or 240V)</p>
	<p>6' CORD & HOOK WITH NO PLUG</p> <p>SKU: C-ACC-A-HKCRD-6FT-UV-NP (120V)</p>
	<p>6' CORD & HOOK WITH STRAIGHT BLADE PLUG</p> <p>SKU: C-ACC-A-HKCRD-6FT-LV-SB (120V)</p>

SIZE COMPARISON (LED VS. FLUORESCENT)

COMPARED TO 6-LAMP – T5HO 54W LINEAR FLUORESCENTS:

- Is 60% smaller for ease of installation
- Consumes less power, while producing the same light output

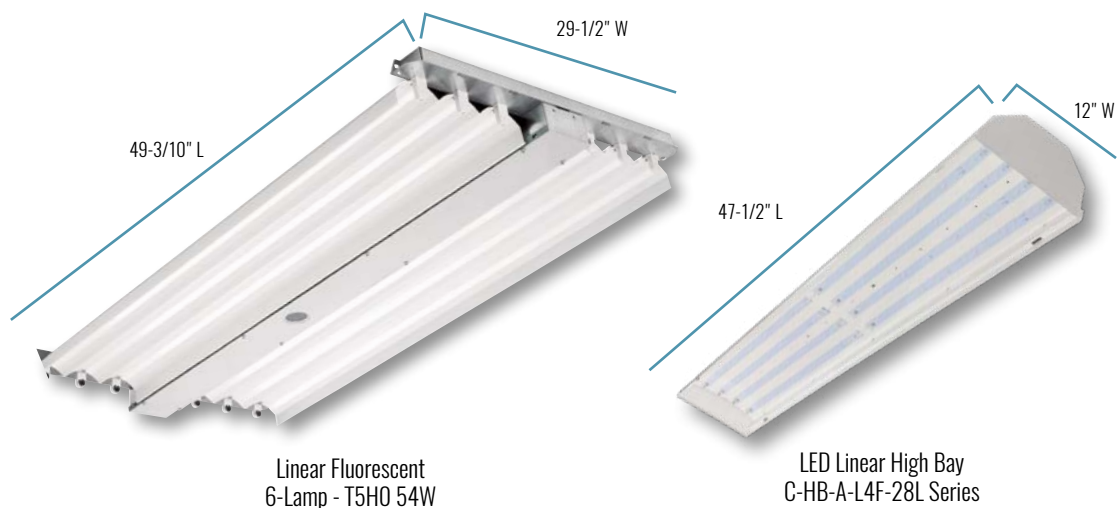

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Efficiency Forward, Inc.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE