

# C-TR-B-FP22 Series

LED Flat Panel - 2' x 2'

Replaces 2 x F32T8/U6



## LOW PROFILE DESIGN, EASY INSTALLATION, FULLY BACKED BY CREE LIGHTING

Reliable, versatile and stylish – that's C-Lite LED Flat Panels. C-Lite LED Flat Panels deliver brighter light and bigger savings, and are fully tested and backed by Cree Lighting!



## PRODUCT SPECIFICATIONS

### OVERVIEW

- Initial Delivered Lumens: 4,000
- CRI: 80
- CCT: Warm White 3500K, Neutral White 4000K, Cool White 5000K
- Mounting: Recessed
- Input Power: 40 Watts
- Dimmable: 0-10V Dimming to 10%
- Operating Range: -20°C (-4°F) - 40°C (104°)
- Lifespan: Estimated >100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5-Years\*
- Replaces 2 x F32T8/U6

FEATURES	BENEFITS	RECOMMENDED USE
<ul style="list-style-type: none"> <li>• Pre-installed driver</li> <li>• White powder coated aluminum frame</li> <li>• Opaque white acrylic lens</li> </ul>	<ul style="list-style-type: none"> <li>• IC Rated for direct contact with insulation</li> <li>• Fits in low-clearance drop ceilings</li> <li>• Fully tested and backed by Cree Lighting</li> </ul>	<ul style="list-style-type: none"> <li>• Offices</li> <li>• Educational &amp; Retail</li> <li>• Commercial &amp; Institutional</li> </ul>

## ORDERING INFORMATION


Example: C-TR-B-FP22-40L-35K-WH

C-TR	B	FP22	40L		WH	
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR	PACKAGING
C-TR	B	FP22 Flat Panel 2' x 2'	40L 4,000 Lumens 40W	35K Warm White (3500K) 40K Neutral White (4000K) 50K Cool White (5000K)	WH White	4 4-Pack

## CERTIFICATIONS



# C-TR-B-FP22 Series

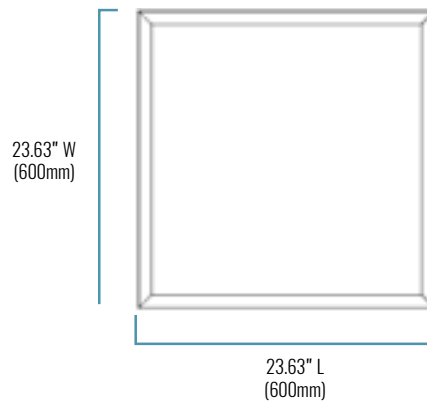

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
23.63" (600mm) L x 23.63" (600mm) W x 0.5" (13mm) H (Panel) 23.63" (600mm) L x 23.63" (600mm)' W x 1.75" (44mm) H (w/Driver)	7.6 lbs.	8 to 12 feet	8' x 8' – 10' x 10'

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Durable aluminum construction White polyester powder-coat Sealed, maintenance-free fixture design
<b>LENS ASSEMBLY</b>	Precision engineered acrylic lens and polymethyl methacrylate (PMMA) diffuser prevents hot spots, shadows and glare, while providing uniform illumination
<b>MOUNTING</b>	Recessed Installs into conventional grid ceiling Pre-installed driver Requires minimum 90°C supply conductors

## ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°C (-4°F) - 40°C (104°F)	Estimated >100,000 Hours	> 0.9	< 20%	0-10V Dimming to 10%
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
<b>CURRENT DRAW (Amps)</b>	0.33A	0.19A	0.17A	0.14A

## WARRANTY & CERTIFICATIONS

WARRANTY	ETL LISTED	DLC
5-Year Limited*	Damp Locations. For indoor use only.	DLC Qualified Please refer to <a href="http://www.designlights.org/QPL">www.designlights.org/QPL</a> for most current information

**CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

US- [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415

Canada- [creelighting-canada.com](http://creelighting-canada.com) T (800) 473-1234 F (800) 890-7507


Rev. Date: V6 R1 01/28/2020

For informational purposes only. Content is subject to change. \*See [creelighting.com/warranty](http://creelighting.com/warranty) for details

**C-LITE**  
LED LIGHTING

# C-TR-B-FP22 Series

## ACCESSORIES

	<b>DRYWALL GRID ADAPTER</b>
	SKU: <b>DGA22-WHT</b> (single-pack) <b>DGA22-WHT-10PK</b> (10-pack) USE: For use when mounting in drywall ceilings
	<b>SUSPENSION KIT</b>
	SKU: <b>FPAC-45-1</b> USE: Suspension Kit with canopy kit and cables <b>Only for use with the Drywall Grid Adaptor Kit</b>