

C-TR-B-FP24 Series

LED Flat Panel - 2' x 4'

Replaces 3 x F32T8



LOW PROFILE DESIGN, EASY INSTALLATION, FULLY BACKED BY CREE LIGHTING

Reliable, versatile and stylish – that’s C-Lite LED Flat Panels. C-Lite LED Flat Panels deliver brighter light and bigger savings, and are fully tested and backed by Cree Lighting!



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 5,000
- CRI: 80
- CCT: Warm White 3500K, Neutral White 4000K, Cool White 5000K
- Mounting: Recessed
- Input Power: 50 Watts
- Dimmable: 0-10V Dimming to 10%
- Operating Range: -20°C (-4°F) - 40°C (104°)
- Lifespan: Estimated >100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5-Years*
- Replaces 3 x F32T8

FEATURES	BENEFITS	RECOMMENDED USE
<ul style="list-style-type: none"> • Pre-installed driver • White powder coated aluminum frame • Opaque white acrylic lens 	<ul style="list-style-type: none"> • IC Rated for direct contact with insulation • Fits in low-clearance drop ceilings • Fully tested and backed by Cree Lighting 	<ul style="list-style-type: none"> • Offices • Educational & Retail • Commercial & Institutional

ORDERING INFORMATION


Example: C-TR-B-FP24-50L-40K-WH-2

C-TR	B	FP24	50L		WH	
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR	PACKAGING
C-TR	B	FP24 Flat Panel 2' x 4'	50L 5,000 Lumens 50W	35K Warm White (3500K) 40K Neutral White (4000K) 50K Cool White (5000K)	WH White	2 2-Pack

CERTIFICATIONS



C-TR-B-FP24 Series

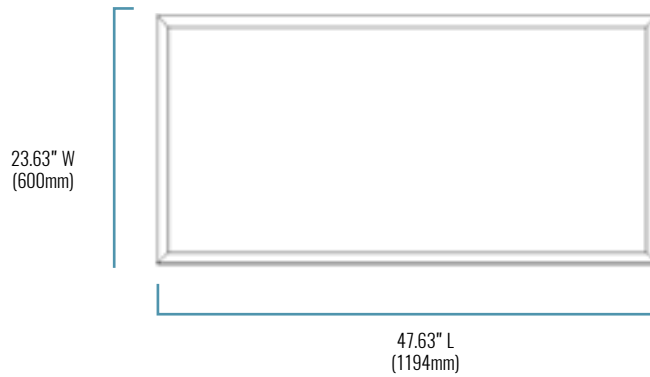

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
47.63" (1194mm) L x 23.63" (600mm) W x 0.5" (13mm) H (Panel) 47.63" (1194mm) L x 23.63" (600mm) W x 1.75" (44mm) H (w/Driver)	14.4 lbs.	8 to 12 feet	8' x 8' – 10' x 10'

FIXTURE SPECIFICATIONS

HOUSING	Durable aluminum construction White polyester powder-coat Sealed, maintenance-free fixture design
LENS ASSEMBLY	Precision engineered acrylic lens and polymethyl methacrylate (PMMA) diffuser prevents hot spots, shadows and glare, while providing uniform illumination
MOUNTING	Recessed Installs into conventional grid ceiling Pre-installed driver Requires minimum 90°C supply conductors

ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°C (-4°F) - 40°C (104°F)	Estimated >100,000 Hours	> 0.9	< 20%	0-10V Dimming to 10%
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.42A	0.24A	0.21A	0.18A

WARRANTY & CERTIFICATIONS

WARRANTY	ETL LISTED	DLC
5-Year Limited*	Damp Locations. For indoor use only.	DLC Qualified Please refer to www.designlights.org/QPL for most current information

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: creelighting-canada.com T (800) 473-1234 F (800) 890-7507


Rev. Date: V6 R2 01/28/2020

For informational purposes only. Content is subject to change. *See creelighting.com/warranty for details

C-LITE
LED LIGHTING

C-TR-B-FP24 Series

ACCESSORIES

	DRYWALL GRID ADAPTER
	SKU: DGA24-WHT (single-pack) DGA24-WHT-10PK (10-pack) USE: For use when mounting in drywall ceilings
	SUSPENSION KIT
	SKU: FPAC-45-1 USE: Suspension Kit with canopy kit and cables Only for use with the Drywall Grid Adaptor Kit

© 2020 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent creelighting.com/patents. C-LITE® and the C-LITE logo are registered trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. The ETL Listed Intertek logo is a trademark of Intertek Testing Services NA, Inc.

US • c-lite.com T (800) 236-6800 F (262) 504-5415

Canada • creelighting-canada.com T (800) 473-1234 F (800) 890-7507

Rev. Date: V6 R2 01/28/2020

For informational purposes only. Content is subject to change. *See creelighting.com/warranty for details

C-LITE
LED LIGHTING