

# C-VT-B-SMCL Series

## LED Vapor Tights - Ceiling Mount

Replaces 100W/200W Incandescent

# C-LITE



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 1,000 or 1,900
- CRI:  $\geq 80$
- CCT: Neutral White 4000K, Cool White 5000K
- Mounting: Ceiling
- Input Power: 12 Watts or 22 Watts
- Dimmable: No
- Operating Range:  $-30^{\circ}\text{C}$  to  $45^{\circ}\text{C}$  ( $-31^{\circ}\text{F}$  -  $113^{\circ}\text{F}$ )
- $L_{70}$  Lifetime @  $25^{\circ}\text{C}$ :  $>100,000$  hours
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 100W Incandescent (10L) or 200W Incandescent (19L)

DURABLE	VERSATILE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• Rugged time-tested design</li> <li>• Sturdy housing and frosted glass globe</li> </ul>	<ul style="list-style-type: none"> <li>• Protects against dust &amp; moisture</li> <li>• Even clean light with multiple mounting options</li> </ul>	<ul style="list-style-type: none"> <li>• Warehouses</li> <li>• Industrial</li> <li>• Retail</li> </ul>	<ul style="list-style-type: none"> <li>• 120V-277V Operation</li> </ul>

### ORDERING INFORMATION


Example: C-VT-B-SMCL-10L-40K-GR

C-VT	B				GR
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR
C-VT	B	SMCL LED Vapor Tight Ceiling Mount	<b>10L</b> 1,000 Lumens, 12W  <b>19L</b> 1,900 Lumens, 22W	<b>40K</b> Neutral White (4000K)  <b>50K</b> Cool White (5000K)	GR Gray

#### CERTIFICATIONS:



# C-VT-B-SMCL Series

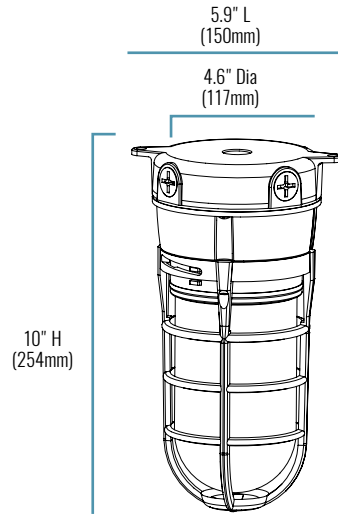

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5.9" (150mm) L x 4.6" (117mm) Dia x 10" (254mm) H	<b>10L:</b> 3.04 lbs. (1.4kg) <b>19L:</b> 3.20 lbs. (1.5kg)	Up to 15 feet	15 feet

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Die-cast aluminum housing and lamp guard Gray polyester powder-coat finish
<b>LENS ASSEMBLY</b>	Screw-in, frosted glass globe provides uniform light distribution
<b>MOUNTING</b>	Die-cast aluminum 4" junction box Four threaded and plugged 1/2" conduit entry points on sides of ceiling box, and one threaded entry point on top of mounting box

## ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L <sub>70</sub> AT 25°C (77°F)		POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE	
-30°C to 45°C (-31°F - 113°F)	Estimated >100,000 Hours		> 0.9	< 20%	No	
INPUT VOLTAGE	LUMEN PACKAGE	WATTAGE	120V	208V	240V	277V
<b>CURRENT DRAW</b> (Amps)	<b>10L</b>	12W	0.09A	0.05A	0.05A	0.04A
	<b>19L</b>	22W	0.18A	0.11A	0.10A	0.09A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	INGRESS PROTECTION	SURGE PROTECTION
5 Year Limited*	Wet Locations	IP65 Rated	4kV

**CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
www.p65warnings.ca.gov

# C-VT-B-SMCL Series

## ACCESSORIES

	<b>15" ALUMINUM SHROUD WITH POWDER-COAT FINISH (SMALL)</b>
	SKU: <b>C-ACC-A-VTSHR-SM-GR</b> (Gray outer surface, white interior)