

C-CP-B-SQ-3L/4L/7L Series

LED Square Canopy Light

Replaces 100W-150W PSMH /175W MH



EXTREMELY DURABLE DESIGN WITH AN EFFICACY UP TO 136 LUMENS PER WATT!



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 3,600 (3L); 4,900 (4L); 7,200 (7L)
- CRI: ≥ 70
- CCT: Neutral White 4000K, Cool White 5000K
- Input Power: 27 W (3L); 36W (4L); 53W (7L)
- Dimmable: No
- Operating Temperature Range: -30°C (-22°F) to 40°C (104°F)
- Estimated L₇₀ Lifetime @ 25°C: > 100,000 hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5 Years*
- Replaces 100W -150W PSMH/175W MH
- BUG Rating per TM-15-11: B1-U3-G1 (3L); B2-U3-G2 (4L & 7L)
- For use under covered ceilings only

| PERFORMANCE | DURABLE | RECOMMENDED USE | INPUT VOLTAGE |
|--|---|--|---|
| <ul style="list-style-type: none"> • Uses up to 80% less energy than comparable PSMH fixtures • Type VS distribution pattern | <ul style="list-style-type: none"> • Polyester powder-coat finish provides corrosion protection for long-lasting color • UV-stabilized lens designed to last • Die-cast aluminum housing | <ul style="list-style-type: none"> • Security • Entryways • Perimeter Lighting • Exterior canopies | <ul style="list-style-type: none"> • Universal (120V through 277V Operation) |

ORDERING INFORMATION


Example: C-CP-B-SQ-3L-40K-WH

| C-CP-B | SQ | | | |
|---------|---------------------|--|---|--|
| PRODUCT | STYLE | LUMEN PACKAGE | CCT | COLOR |
| C-CP-B | SQ Square Canopy | 3L 3,600 Lumens 27W 4L 4,900 Lumens 36W 7L 7,200 Lumens 53W | 40K Neutral White (4000K) 50K Cool White (5000K) | DB Dark Bronze WH White |

CERTIFICATIONS:



C-CP-B-SQ-3L/4L/7L Series

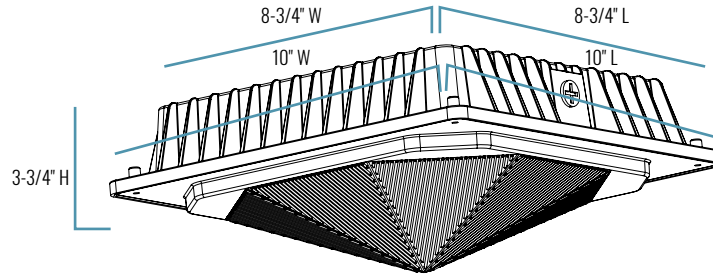

SERIES OVERVIEW

| DIMENSIONS | PRODUCT WEIGHT | MOUNTING HEIGHT | SPACING |
|--|--|-----------------|----------------------------------|
| 8-3/4" L x 8-3/4" W x 3-3/4" H 10" L x 10" W (Outer Edge) | 4.03 lbs. (3L) 4.14 lbs. (4L) 4.44 lbs. (7L) | 8 to 15 feet | 3 to 4 times the mounting height |

FIXTURE SPECIFICATIONS

| | |
|----------------------|---|
| HOUSING | Low-copper, die-cast aluminum housing Dark bronze or white polyester powder-coat finish |
| LENS ASSEMBLY | UV-stabilized acrylic prismatic refractor with self-retaining screws |
| MOUNTING | 3/4" conduit entry on top for pendant mounting (pendant by others) 1/2" conduit entries on two sides |

ELECTRICAL PERFORMANCE

| OPERATING TEMPERATURE RANGE | ESTIMATED L ₇₀ LIFETIME @ 25° C (77°F) | POWER FACTOR | TOTAL HARMONIC DISTORTION | DIMMABLE |
|-------------------------------|---|--------------|---------------------------|----------|
| -30°C (-22°F) to 40°C (104°F) | > 100,000 hours | > 0.9 | < 20% | No |

| LUMEN PACKAGE | SYSTEM WATTS (120-277V) | INPUT VOLTAGE | 120V | 208V | 240V | 277V |
|---------------|-------------------------|----------------------------|-------|-------|-------|-------|
| 3L | 27 | CURRENT DRAW (Amps) | 0.23A | 0.13A | 0.11A | 0.10A |
| 4L | 36 | | 0.30A | 0.17A | 0.15A | 0.13A |
| 7L | 53 | | 0.44A | 0.25A | 0.22A | 0.19A |

WARRANTY AND CERTIFICATIONS

| WARRANTY | cULus LISTED | DLC |
|-----------------|---|--|
| 5 Year Limited* | Wet Locations - Not intended for use with direct exposure to high-pressure water | DLC Premium Qualified. Please refer to www.designlights.org/QPL for most current information |

CA RESIDENTS WARNING: Cancer and Reproductive Harm – www.p65warnings.ca.gov

© 2020 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-LITE® and the C-LITE logo are registered trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. The UL logo is a registered trademark of UL LLC. The DLC QPL Premium logo is a registered trademark of Efficiency Forward, Inc.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: creelighting-canada.com T (800) 473-1234 F (800) 890-7507

Rev. Date: 06/05/2020

For informational purposes only. Content is subject to change. *See creelighting.com/warranty for details

C-LITE
LED LIGHTING