

C-CP-A-SQ-120L Series

LED Square Canopy Light

Replaces 250W PSMH



EXTREMELY DURABLE DESIGN WITH AN EFFICACY UP TO 127 LUMENS PER WATT!

Illuminate the darkest of areas. These fixtures offer a light output of 12,000 lumens – the highest in the canopy lineup – making them the most impressive canopy lights, yet!



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 12,000
- CRI: ≥ 70
- CCT: Neutral White 4000K, Cool White 5000K
- Input Power: 95 Watts
- Dimmable: No
- Operating Range: -20°C (-4°F) - 40°C (104°F)
- Lifespan: Estimated >100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5 Years*
- Replaces 250W PSMH

FEATURES	DURABLE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Uses 60% less energy than comparable HID fixtures • Type VS distribution pattern • Delivers up to 10% more light than comparable HID fixtures 	<ul style="list-style-type: none"> • Polyester powder-coat finish provides corrosion protection for long-lasting color • UV-stabilized lens designed to last 	<ul style="list-style-type: none"> • Security • Entryways • Perimeter Lighting • Exterior canopies 	<ul style="list-style-type: none"> • Universal (120V through 277V Operation)

ORDERING INFORMATION


Example: C-CP-A-SQ-120L-40K-WH

PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-CP-A	SQ Square Canopy	120L 12,000 Lumens 95W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze WH White

CERTIFICATIONS:



C-CP-A-SQ-120L Series

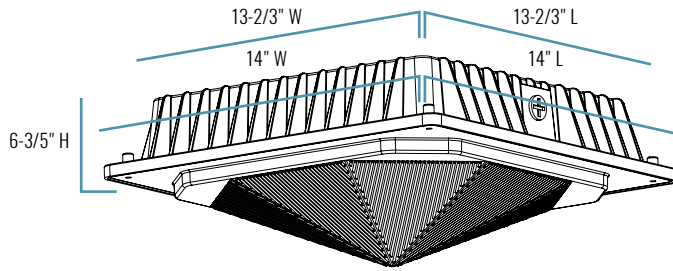

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
13-2/3" L x 13-2/3" W x 6-3/5" H 14" L x 14" W (Outer Edge)	15 lbs.	10 to 20 feet	2 to 3 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Low-copper, die-cast aluminum housing Dark bronze or white polyester powder-coat finish
LENS ASSEMBLY	UV-stabilized acrylic prismatic refractor with self-retaining screws
MOUNTING	3/4" conduit entry on top for pendant mounting 1/2" conduit entries on two sides

ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°C (-4°F) - 40°C (104°F)	Estimated >100,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.79A	0.46A	0.40A	0.34A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5 Year Limited*	Wet Locations - covered ceiling mount only. Not intended for use with direct exposure to high-pressure water	DLC Qualified

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Efficiency Forward, Inc

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V1 10/11/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE