

# C-VT-A-SMWL/LGWL Series

## LED Vapor Tights - Wall Mount - Small & Large

Replaces 100W/120W Incandescent



Small

Large

### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 900 (small), 1,200 (large)
- CRI:  $\geq 70$
- CCT: Neutral White 4000K
- Mounting: Wall
- Input Power: 14 Watts (small), 22 Watts (large)
- Dimmable: No
- Operating Range:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ ) -  $50^{\circ}\text{C}$  ( $122^{\circ}\text{F}$ )
- Lifespan: Estimated 172,000 Hours (small), 118,000 Hours (large)
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 100W Incandescent (small), 120W Incandescent (large)

DURABLE	VERSATILE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• Rugged time-tested design</li> <li>• Sturdy housing and frosted glass globe</li> </ul>	<ul style="list-style-type: none"> <li>• Protects against dust &amp; moisture</li> <li>• Even clean light with several mounting options</li> </ul>	<ul style="list-style-type: none"> <li>• Cold Storage</li> <li>• Manufacturing</li> <li>• Bridges &amp; Tunnels</li> </ul>	<ul style="list-style-type: none"> <li>• 120V Operation</li> </ul>


### ORDERING INFORMATION

Example: C-VT-A-SMWL-9L-40K-GR

PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-VT-A			40K	GR
C-VT-A	SMWL LED Vapor Tight Wall Mount Small	9L (small) 900 Lumens 14W	40K Neutral White (4000K)	GR Gray
	LGWL LED Vapor Tight Wall Mount Large	12L (large) 1,200 Lumens 22W		

#### CERTIFICATIONS:

# C-VT-A-SMWL/LGWL Series

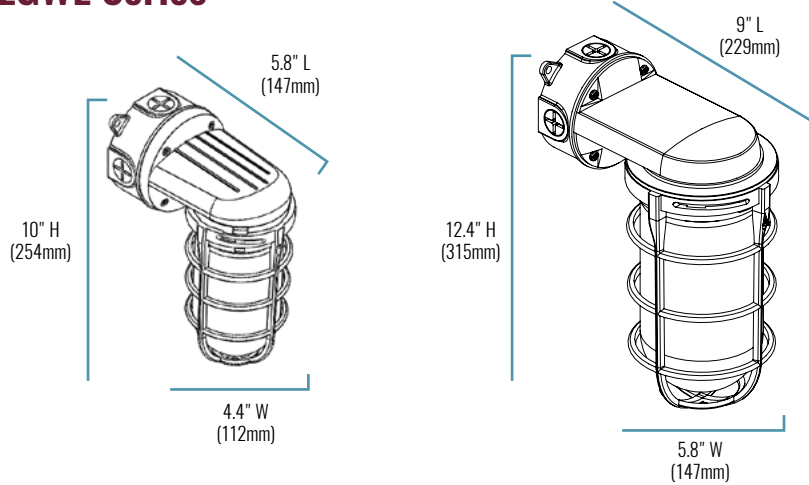

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5.8" (147mm) L x 4.4" (112mm) W x 10" (254mm) H (small) 9" (229mm) L x 5.8" (147mm) W x 12.4" (315mm) H Dia (large)	3.3 lbs. (small) 5.2 lbs. (large)	8 to 12 feet	12 feet

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Die-cast aluminum housing and lamp guard Gray polyester powder-coat finish
<b>LENS ASSEMBLY</b>	Screw-in, frosted glass globe provides uniform light distribution
<b>MOUNTING</b>	Die-cast aluminum 4" junction box Five threaded and plugged 3/4" conduit entry points

## ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F) - 50°C (122°F)	Estimated 172,000 Hours (small) 118,000 Hours (large)	> 0.9	< 20%	No
<b>INPUT VOLTAGE</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>
<b>CURRENT DRAW (Amps)</b>	0.11A (small) 0.16A (large)	N/A	N/A	N/A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

**CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.cree.com/patents](http://www.cree.com/patents). The CREE LEDs logo, C-LITE™ and the C-LITE LED Lighting by Cree logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada) T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 10/25/2018

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING BY CREE