

C-VT-B-SMWL Series

LED Vapor Tights - Wall Mount
Replaces 100W/200W Incandescent

C-LITE



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 1,000 or 1,900
- CRI: ≥ 80
- CCT: Neutral White 4000K, Cool White 5000K
- Mounting: Wall
- Input Power: 12 Watts or 22 Watts
- Dimmable: No
- Operating Range: -30°C to 45°C (-31°F - 113°F)
- L_{70} Lifetime @ 25°C : $>100,000$ hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 100W Incandescent (10L) or 200W Incandescent (19L)

DURABLE	VERSATILE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Rugged time-tested design • Sturdy housing and frosted glass globe 	<ul style="list-style-type: none"> • Protects against dust & moisture • Even clean light with multiple mounting options 	<ul style="list-style-type: none"> • Warehouses • Industrial • Retail 	<ul style="list-style-type: none"> • 120V-277V Operation


ORDERING INFORMATION

Example: C-VT-B-SMWL-10L-40K-GR

C-VT	B	SMWL			GR
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR
C-VT	B	SMWL LED Vapor Tight Wall Mount	10L 1,000 Lumens, 12W 19L 1,900 Lumens, 22W	40K Neutral White (4000K) 50K Cool White (5000K)	GR Gray

CERTIFICATIONS:

C-VT-B-SMWL Series

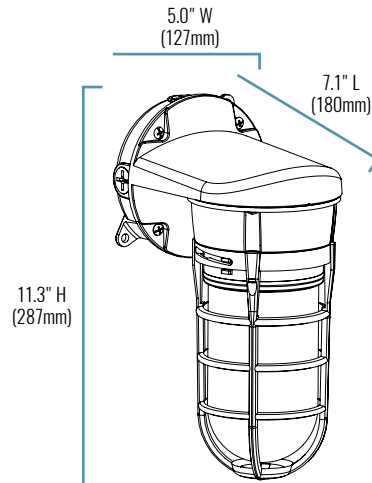

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
7.1" (180mm) L x 5.0" (127mm) W x 11.3" (287mm) H	10L: 3.70 lbs. (1.7kg) 19L: 3.86 lbs. (1.8kg)	Up to 15 feet	15 feet

FIXTURE SPECIFICATIONS

HOUSING	Die-cast aluminum housing and lamp guard Gray polyester powder-coat finish
LENS ASSEMBLY	Screw-in, frosted glass globe provides uniform light distribution
MOUNTING	Die-cast aluminum 4" junction box Four threaded and plugged 1/2" conduit entry points on sides of ceiling box, and one threaded entry point on back of mounting box

ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-30°C to 45°C (-31°F - 113°F)	Estimated >100,000 Hours	> 0.9	< 20%	No

INPUT VOLTAGE	LUMEN PACKAGE	WATTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	10L	12W	0.09A	0.05A	0.05A	0.04A
	19L	22W	0.18A	0.11A	0.10A	0.09A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	INGRESS PROTECTION	SURGE PROTECTION
5 Year Limited*	Wet Locations	IP65 Rated	4kV

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov

© 2019 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-LITE™ and the C-LITE logo are trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. The UL logo is a registered trademark of UL LLC.

US: www.C-LITE.com T (800) 236-6800 F (262) 504-5415 Canada: creelighting-canada.com T (800) 473-1234 F (800) 890-7507

Rev. Date: V1 07/26/2019

For informational purposes only. Content is subject to change. *See creelighting.com/warranty for details

C-LITE