

C-WR-A-WLIN2-24L Series

LED Surface Ambient - 2'

Replaces 1-Lamp T8



BIG ENERGY SAVINGS MADE EASY!

Replace 1-lamp fluorescent wraps without repainting or patching. This attractive fixture features smooth, even light, and saves you money with easy installation, quality construction and exceptional energy efficiency.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 2,400
- CRI: ≥ 80
- CCT: Soft White 3000K, Warm White 3500K, Neutral White 4000K, Cool White 5000K
- Mounting: Surface or Junction Box
- Input Power: 19 Watts
- Dimmable: 0-10V dimming to 10%
- Operating Range: -40°C (104°F) - 40°C (104°)
- Lifespan: Estimated >100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5-Years*
- Replaces 1-Lamp T8

DURABLE	BENEFITS	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Made with High Quality Steel with high reflectance paint, providing high lumen output 	<ul style="list-style-type: none"> • High efficiency fixture with 126 lumens per watt • Fully tested and backed by Cree 	<ul style="list-style-type: none"> • Industrial • Commercial • Maintenance Areas & Warehouses • General Illumination 	<ul style="list-style-type: none"> • Universal (120V through 277V Operation)

ORDERING INFORMATION


Example: C-WR-A-WLIN2-24L-30K-WH

C-WR	A	WLIN2	24L		WH
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WR	A	WLIN2 Surface Ambient 2'	24L 2,400 Lumens 19W	30K Soft White (3000K) 35K Warm White (3500K) 40K Neutral White (4000K) 50K Cool White (5000K)	WH White

CERTIFICATIONS:



C-WR-A-WLIN2-24L Series

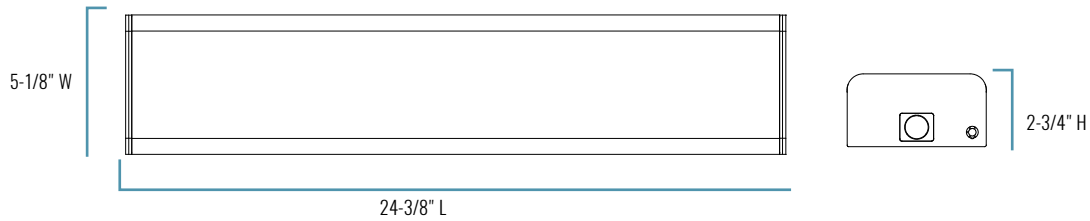

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
24-3/8" L x 5-1/8" W x 2-3/4" H	4.0 lbs.	8 to 12 feet	1-2 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	High quality steel construction High reflectance paint
LENS ASSEMBLY	Polycarbonate lens
MOUNTING	Able to be surfaced mounted to 2.75", 3.5" or 4.75" junction box

ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F) - 40°C (104°F)	Estimated >100,000 Hours	> 0.9	< 20%	0-10V dimming to 10%
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.16A	0.09A	0.079A	0.068A

WARRANTY & CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5-Year Limited*	Damp Locations	DLC Premium Qualified Please refer to www.designlights.org/QPL for most current information


CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov

US: www.c-lite.com T (800) 236-6800 F (262) 504-5415 Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507
Rev. Date: V4 11/26/2019 For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING

C-WR-A-WLIN2-24L Series

ACCESSORIES (Sold Separately)

	PIR MOTION SENSOR On/Off functionality (no dim setting)
	SKU: C-PHB-A-HBPIR

© 2019 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The C-LITE™ and C-LITE LED Lighting by Cree logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL Premium logo is a trademark of Efficiency Forward, Inc.

US: www.c-lite.com T (800) 236-6800 F (262) 504-5415 Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507
Rev. Date: V4 11/26/2019 For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING