



Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/bollards-and-pathway/cree-edge-pathway>

55



RESTL Test Report #: PL5759-001
 PWY-EDG-5S-**-02-E-UL-350-40K
 Initial Delivered Lumens: 1,897




PWY-EDG-5S-**-02-E-UL-350-40K
 Mounting Height: 3' [0.9m] A.F.G.
 Initial Delivered Lumens: 1,868
 Initial FC at grade

Type V Short Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,868	B1 U2 G1	1,940	B1 U2 G1
525mA				
02	2,615		2,710	B1 U2 G1

* Initial delivered lumens at 25°C (77°F). Actual production may vary between -10 and +10% of initial delivered lumens.
 ** For more information on the IES BUG (Backlight Glare) Rating, visit: <https://www.ies.org/wp-content/uploads/2017/03/IES-UGRatingsAddendum.pdf>

with Welded Base

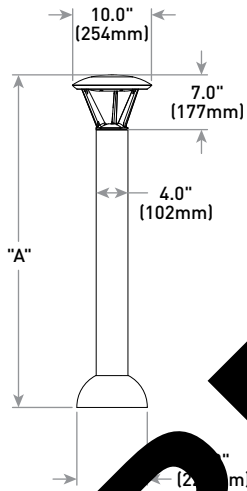

Model	Dimmable	Weight
Pathway (P3)	Yes (914mm)	17.9 lbs. [8.1kg]
Pathway (P2)	Yes (68mm)	18.6 lbs. [8.4kg]
Pedestal (P8)	Yes (438mm)	28.4 lbs [12.9kg]

* Add 4.5 lbs. [2.0kg] for 480V

PRELIMINARY