

INSTALL A LOCAL AUDACY® SYSTEM PROXY

LIST OF MATERIALS:

59-PROXY-RP01 Audacy Proxy Kit


AC/DC Wall-Mount Power Adapter

Micro SD Card Reader

Micro SD Memory Card




1. In the web Interface SETUP tab, click **DOWNLOAD CLIENT PROXY CONFIG** (config.json)

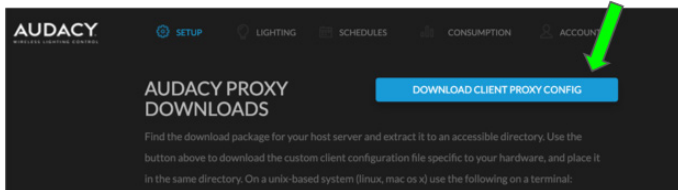

2. Insert pre-formatted SD card provided into computer with the supplied USB adapter.



3. Drag “config.json” onto the USB drive folder labeled “boot.”

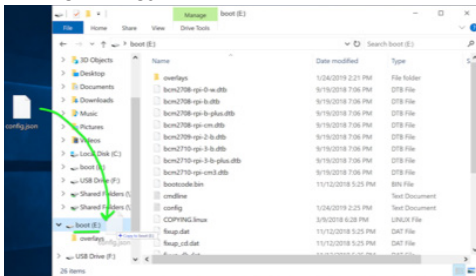

4. Insert SD card into local Proxy Server
Note: Make sure to use the proper orientation



5. Connect Ethernet to local Proxy Server



1375 Park Avenue, Sycamore, IL 60178, USA
(800) 273-9989 | contactus@audacywireless.com
www.audacywireless.com
IS-0035

AUDACY
WIRELESS LIGHTING CONTROL
YOUR WORLD IN A BETTER LIGHT