

# C-EE-A-EMG-2L-REC Series

## LED Recessed Emergency Light



### RELIABLE EMERGENCY LIGHTING AT AN AFFORDABLE PRICE

Our C-Lite LED Recessed Emergency Light is UL Listed and ideal for general purpose emergency lighting where you need it most. Features 10W of remote capability with battery backup and white housing.



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 65 Lumens per head
- Input Power: 5W
- Finish Color: White
- Operating Temperature Range: 60°F to 90°F (15°C to 32°C)
- Battery Backup: Yes
- Limited Warranty: 5 Years\*
- UL Listed
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

VERSATILE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• Two fully adjustable 1W LED lamp heads</li> <li>• Recessed fixture housing</li> <li>• Remote Capable*</li> </ul>	<ul style="list-style-type: none"> <li>• General purpose emergency lighting</li> <li>• Indoor commercial, retail &amp; industrial applications</li> </ul>	<ul style="list-style-type: none"> <li>• 120V or 277V Operation</li> </ul>

### ORDERING INFORMATION

Example: C-EE-A-EMG-2L-REC-BB-WH


C-EE	A	EMG	2L	REC	BB	WH
PRODUCT	SERIES	TYPE	LUMEN PACKAGE	RECESSED	BATTERY	COLOR
C-EE	A	EMG LED Emergency Light	2L 65 Lumens/Head	REC Recessed	BB Battery Backup	WH White

\*Unit has 10W of remote capability.

### CERTIFICATIONS



# C-EE-A-EMG-2L-REC Series

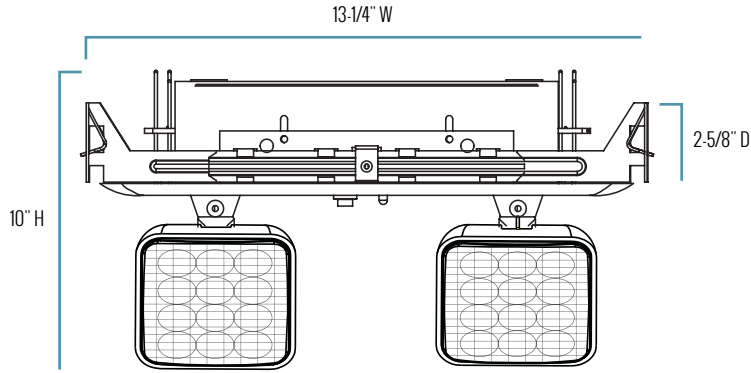

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
2-5/8" D x 13-1/4" W x 10" H (Width includes mounting clips, depth is only faceplate)	4.0 lbs.

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Trim attaches to housing with spring clips Trim plate constructed of rugged 20-gauge steel in white finish
<b>MOUNTING</b>	Compatible with drywall or drop ceilings (bar hangers included)
<b>INCLUDES</b>	Sealed 6V SLA (lead acid) battery backup (Minimum 90 minute emergency illumination) LVD (Low Voltage Disconnect) prevents battery from deep discharge Charge/Power on LED Light indicator (Battery recharges within 24 hours via internal solid state, two rate charger)

## ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE		
60°F to 90°F (15°C to 32°C)		
INPUT VOLTAGE	120V	277V
CURRENT DRAW (Amps):	0.05A	0.03A





## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited (Housing & Electronics) 2-Year Pro-Rated (Battery)	Dry Locations

**CA RESIDENTS WARNING:** Cancer and Reproductive Harm - [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# C-EE-A-EMG-2L-REC Series

## ACCESSORIES

	<b>1W SINGLE REMOTE HEAD - WHITE</b>
	SKU: <b>C-EE-A-EMG-1L-REM-WH</b> USE: Damp Listed
	<b>1W SINGLE REMOTE HEAD - GRAY</b>
	SKU: <b>C-EE-A-EMG-1L-REM-WET-GR</b> USE: Wet Listed
	<b>1W DOUBLE REMOTE HEAD - 2W TOTAL - WHITE</b>
	SKU: <b>C-EE-A-EMG-2L-REM-WH</b> USE: Damp Listed
	<b>1W DOUBLE REMOTE HEAD- 2W TOTAL -GRAY</b>
	SKU: <b>C-EE-A-EMG-2L-REM-WET-GR</b> USE: Wet Listed

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 03/01/2021

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING