

C-EE-A-EMG-DEC Series

LED Wet-Listed Emergency Light



This Emergency Light Has Your Back

Our LED Wet-listed Emergency Light delivers 1286 lumens in AC mode and 350 lumens in EM mode. It's available in bronze or white finish, comes with a 5-year warranty, and includes a battery backup.



White finish also available



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 1286 lumens in AC mode and 350 lumens in EM mode
- Input Power: 12W (2 LEDs x 6W) per unit
- Finish Color: Bronze, White
- Operating Temperature Range: 32°F to 122°F (0°C to 50°C) -22°F to 122°F (-30°C to 50°C) **(Cold Locations)**
- Battery Backup: Yes
- Limited Warranty: 5 Years*
- UL Listed
- Field-selectable wiring allows for AC operation so unit can be controlled with a wall-switch, photocell or any other switching mechanism
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

HIGH END FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Includes photocell & self-diagnostic testing for reliable operation • Sealed decorative housing is suitable for wet locations • Easy-mount back plate • LED indicator light shows battery charge status • Cold location version for use to -22°F (-30°) 	<ul style="list-style-type: none"> • General purpose emergency lighting • Indoor/outdoor commercial, retail & industrial applications 	<ul style="list-style-type: none"> • Universal (120V through 277V Operation)

ORDERING INFORMATION


Example: C-EE-A-EMG-DEC1L-WETCOLD-BB-DB

C-EE	A	EMG	DEC			BB	
PRODUCT	SERIES	TYPE	DECORATIVE	LUMEN PACKAGE	LISTED	BATTERY	FINISH COLOR
C-EE	A	EMG LED Emergency Light	DEC Decorative	1L For WETCOLD Version Only	WET Wet-Listed WETCOLD Wet-Listed, Cold Location	BB Battery Backup	DB Dark Bronze WH White

CERTIFICATIONS:



C-EE-A-EMG-DEC Series

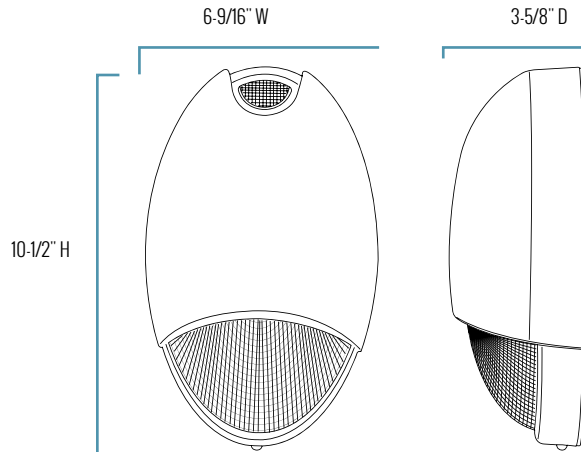

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
3-5/8" D x 6-9/16" W x 10-1/2" H	4.65 lbs.

FIXTURE SPECIFICATIONS

HOUSING	Die-cast aluminum housing Available in dark bronze or white durable powder-coat finish Sealed and gasketed
WIRING OPTIONS	Normally On - Fixture on in AC and emergency modes Normally Off - Fixture will only come on in emergency mode Switched - Fixture can be switched on and off. Unit will always come on in emergency mode regardless of switch position Photocell sensor included as a standard for use as dusk to dawn light Field selectable wiring allows for AC option of unit to be controlled using a wall switch or photocell or any other switching mechains
MOUNTING	Back plate for wall mount Universal knockout pattern on back plate provides for easy installation over most standard junction boxes Threaded opening at the top of the enclosure for conduit mount
INCLUDES	Sealed 4.8V maintenance-free nickel cadmium battery backup (Minimum 90 minute emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Push-to-test switch Photocell sensor and self-diagnostics come standard with fixture

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE				
32°F to 122°F (0°C to 50°C), -22°F to 122°F (-30°C to 50°C) (Cold Locations)				
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps):	0.10A	0.058A	0.052A	0.043A

C-EE-A-EMG-DEC Series

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited Warranty	Wet Locations

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm - www.p65warnings.ca.gov

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 02/26/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING