

INSTALLATION INSTRUCTIONS

IMPORTANT SAFEGUARDS


When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. To reduce the risk of electrical shock, turn off power supply before installation or servicing.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

TO INSTALL:

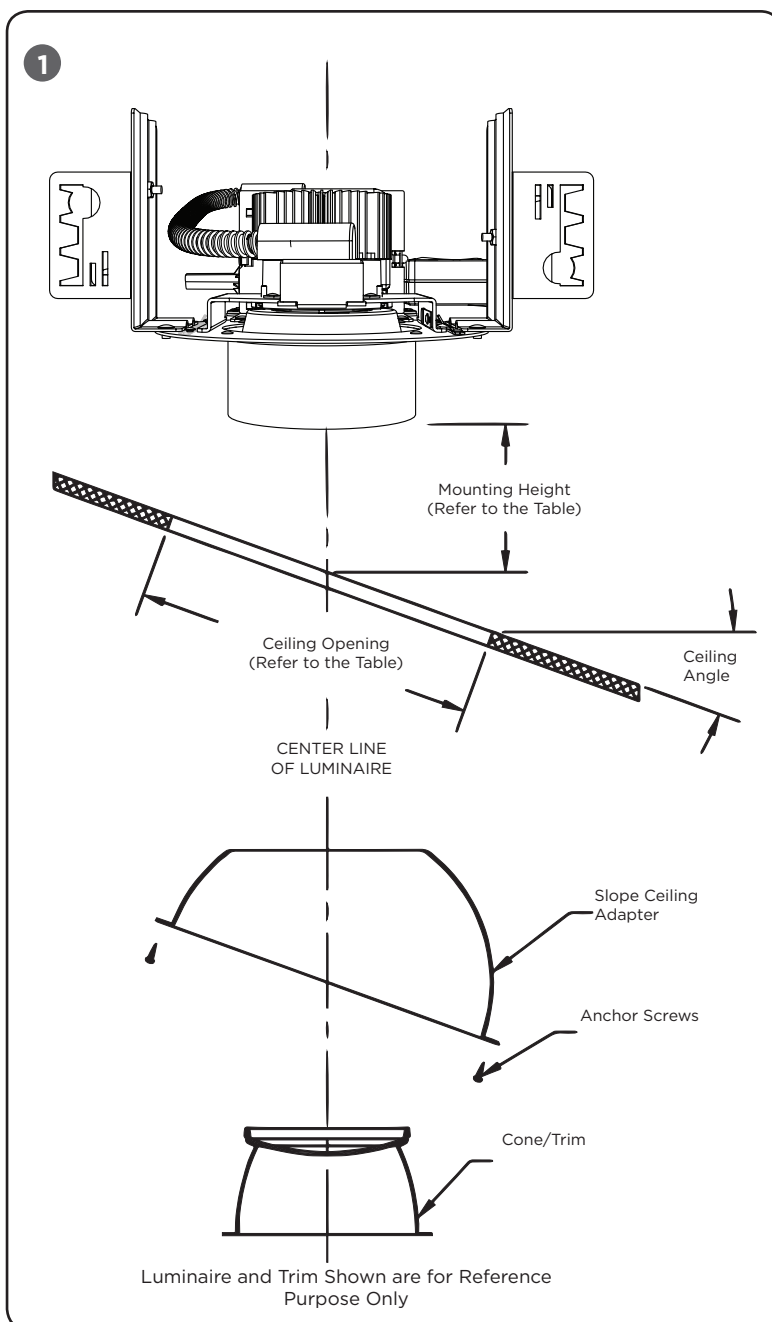

LUMINAIRE INSTALLATION

STEP 1:

Install fixture centered above ceiling cutout. (Refer to Table below for correct ceiling cutout diameter)

STEP 2:

Be sure that the bottom of the fixture is correctly spaced from the bottom of the ceiling. This is measured at the center line of the fixture. Refer to Table below for correct height.

Luminaire Type	Ceiling Cutout Size	Mounting Height
4 in round downlight	8.25 in.	3 in.
6 in round downlight	11.25 in.	4.125 in.

STEP 3:

The fixture can be supported with C-channels, rigid conduit or cable.

SLOPED CEILING ADAPTER (SCA) INSTALLATION

STEP 1:

Insert sloped ceiling adapter (SCA) through ceiling opening.

STEP 2:

Assure that frame extender passes through the SCA opening. See **Figure 2**.

STEP 3:

Secure SCA in place with (4) included anchor screws to ceiling, making sure not to over tighten the screw. See **Figure 2**.

STEP 4:

Install trim in fixture. See **Figure 3**.

