

# SmartCast Link™ Hardware

Extend the Power and Value of Your SmartCast® Network Far Beyond Lighting



## Gain Even Greater Profitability, Productivity and Control

The SmartCast Link™ device is the secure and powerful microcomputer at the heart of the SmartCast Intelligence Platform™. Together with the software it hosts (purchased separately), SmartCast Link™ hardware allows your SmartCast® lighting networks to communicate with and be controlled by other applications through the SmartCast® API.

## SmartCast Advisor™: Analytics for Peak Performance

SmartCast Advisor™ software distills massive amounts of information from your lighting network into clear, actionable insights so you can repurpose wasted space and achieve even deeper energy savings.

## Share Your SmartCast® Data with BACnet®

A SmartCast® lighting network with the SmartCast BACnet® app (purchased separately) gives you control over HVAC loads by sharing occupancy data from your lighting network with your building management system — so you can stop spending money to heat and cool unoccupied spaces.

## Yes, You Can Have an App For That


Cree Lighting's Application Programming Interface (API) provides a highly secure, future-ready protocol allowing third-party developers to expand and extend the reach of your lighting network intelligence for seamless interoperability and virtually limitless potential with building automation systems and IoT applications.

# SmartCast Intelligence Platform™




## SmartCast® Wireless Technology

WIRELESS LIGHTING NETWORK (1)

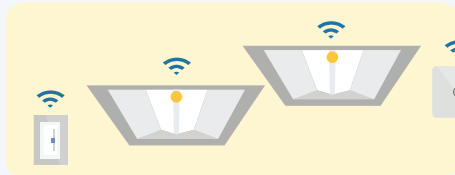

WIRELESS LIGHTING NETWORK (n)

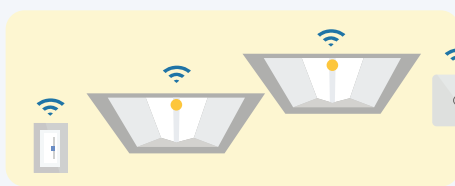

SmartCast®  
Wireless Gateway




OR





## SmartCast® PoE Technology

PoE LIGHTING NETWORK (1)

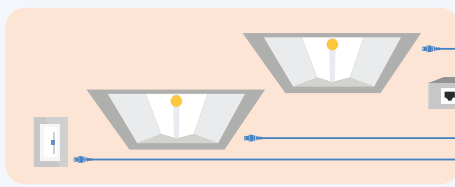

PoE LIGHTING NETWORK (n)

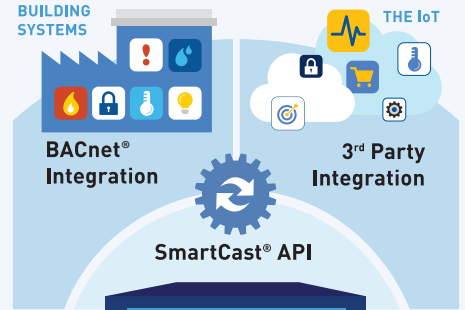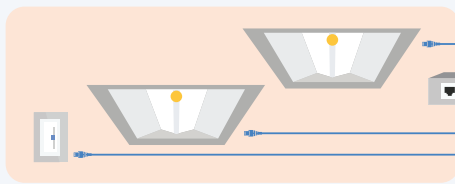

SmartCast Link™



SmartCast® Apps

DATA - ENABLED BUSINESS INSIGHTS

## PRODUCT SPECIFICATIONS

### Processor/Cache

CPU: Intel® Pentium® Processor N3700 Quad Core

### Device Memory

RAM: 4GB SO-DIMM

Disk Space: 120GB Minimum

### Input/Output Ports

LAN: 4x RJ45 Gigabit Ethernet LAN ports

USB: 2x USB 3.0 ports

Display: 1x Display Port, 1x HDMI, 1x VGA (Two Independent Displays)

Other: TPM 1.2 Header

Limited Warranty†: 3 years

†See <http://creelighting.com/warranty> for warranty terms

Visit [creelighting.com/smartcast](http://creelighting.com/smartcast) or contact a Cree Lighting representative to learn more.